

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
28 April 2005 (28.04.2005)

PCT

(10) International Publication Number  
**WO 2005/039073 A1**

(51) International Patent Classification<sup>7</sup>: **H04B 7/08**

Mountain View, CA 94043 (US). HO, Minnie; 405 Becker Lane, Los Altos, CA 94022 (US).

(21) International Application Number:  
PCT/US2004/032948

(74) Agents: SCOTT, John, C. et al.; The Law Offices of John C. Scott, LLC, c/o PortfolioIP, P.O. Box 52050, Minneapolis, MN 55402 (US).

(22) International Filing Date: 6 October 2004 (06.10.2004)

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:  
10/684,850 14 October 2003 (14.10.2003) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(71) Applicant (for all designated States except US): INTEL CORPORATION (a Corporation of Delaware) [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): LI, Qinghua [US/US]; 4314 East Valley Avenue, Pleasanton, CA 94566 (US). LIN, Xintain; 111 Rengstorff Avenue, #28,

[Continued on next page]

(54) Title: LOW BIT ERROR RATE ANTENNA SWITCH FOR WIRELESS COMMUNICATIONS

(57) Abstract: A switched antenna system selects an antenna based on symbol error rate.

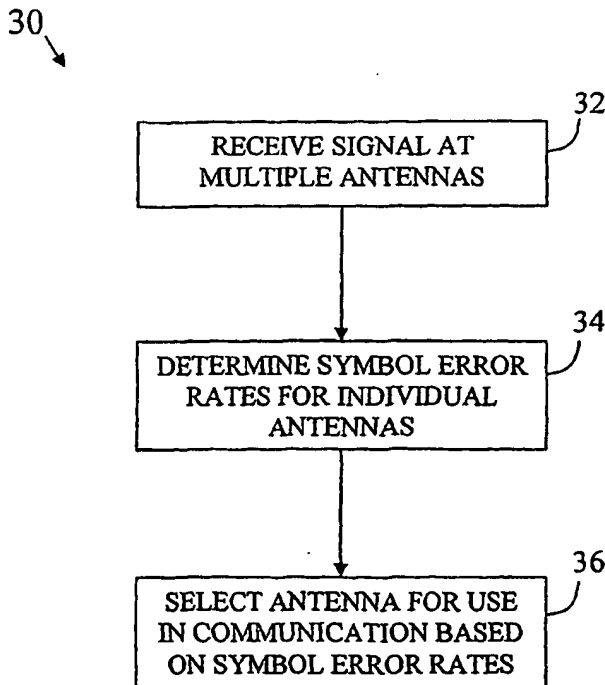

WO 2005/039073 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— with international search report

## LOW BIT ERROR RATE ANTENNA SWITCH FOR WIRELESS COMMUNICATIONS

5

### FIELD OF THE INVENTION

The invention relates generally to wireless communications and, more particularly, to antenna selection techniques for use therein.

### BACKGROUND OF THE INVENTION

10

A switched antenna system is a system that selects one out of a group of antennas to support wireless communication at a particular time based on some selection criterion. A switched antenna system may be implemented to overcome problems caused by, for example, multipath fading and/or other channel effects that may decrease the quality of a wireless signal. To be effective, the selection criterion used in a switched antenna arrangement should be capable of reliably identifying an antenna in the group that will result in enhanced performance in a corresponding system.

15

### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram illustrating an example switched antenna arrangement in accordance with an embodiment of the present invention;

20

Fig. 2 is a flowchart illustrating an example method for use in selecting an antenna in a wireless communication system in accordance with an embodiment of the present invention; and

Fig. 3 is a flowchart illustrating an example method for use in selecting an antenna in a multicarrier communication system in accordance with an embodiment of the present invention.

25

### DETAILED DESCRIPTION

In the following detailed description, reference is made to the accompanying drawings that show, by way of illustration, specific embodiments in which the invention may be

practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention. It is to be understood that the various embodiments of the invention, although different, are not necessarily mutually exclusive. For example, a particular feature, structure, or characteristic described herein in connection with one embodiment may be implemented within other embodiments without departing from the spirit and scope of the invention. In addition, it is to be understood that the location or arrangement of individual elements within each disclosed embodiment may be modified without departing from the spirit and scope of the invention. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims, appropriately interpreted, along with the full range of equivalents to which the claims are entitled. In the drawings, like numerals refer to the same or similar functionality throughout the several views.

Fig. 1 is a block diagram illustrating an example switched antenna arrangement 10 in accordance with an embodiment of the present invention. The switched antenna arrangement 10 may be implemented in any of wide range of different wireless devices, systems, and components including, for example, wireless access points, wireless client devices, wireless network interface cards (NICs) and other wireless network interface structures, cellular telephones and other handheld wireless communicators, personal digital assistants having wireless functionality, pagers, radio frequency integrated circuits (RFICs), and others. As will be described in greater detail, the switched antenna arrangement 10 may be capable of implementing antenna diversity techniques to improve the overall performance of a corresponding device, system, or component. As illustrated, the switched antenna arrangement 10 may include one or more of the following: a number of antennas 12, 14, an antenna switch 16, a wireless communication circuit 18, and a switch controller 20. The wireless communication circuit 18 may include, for example, a wireless receiver, a wireless transmitter, or a wireless transceiver. The wireless communication circuit 18 may also include baseband circuitry to process baseband transmit and/or receive information in the system (e.g., a decoder within a receive chain to decode received information, etc.) The wireless communication circuit 18 may be configured in accordance with one or more wireless communication standards (e.g., wireless networking standards, cellular standards, etc.). In at least one embodiment, for example, the wireless communication circuit 18 is configured in accordance with the IEEE 802.11a wireless networking standard (IEEE Std

802.11a-1999). Other wireless standards and combinations of different standards may alternatively be used.

The antenna switch 16 is operative for coupling a selected one of the antennas 12, 14 to the wireless communication circuit 18 to support communication activity. Although only two antennas are illustrated in Fig. 1, it should be appreciated that any number of antennas (greater than one) may be used. In addition, any type of antennas may be used including, for example, dipoles, patches, helixes, arrays, and others, including combinations of the above. The switch controller 20 controls the operation of the antenna switch 16. That is, the switch controller 20 determines which one of the antennas 12, 14 should be coupled to the wireless communication circuit 18 at a particular time and instructs the antenna switch 16 accordingly. The switch controller 20 may determine which antenna to couple to the wireless communication circuit 18 based on, for example, information received from the wireless communication circuit 18.

In at least one embodiment of the invention, the switch controller 20 selects an antenna based on symbol error rates associated with the antennas of the system. That is, the switch controller 20 may include an error estimator to estimate a symbol error rate for each of the available antennas (or for each of a subset of the available antennas) and select an antenna for use in communication based on the symbol error rates (e.g., selecting an antenna with the lowest symbol error rate, etc.). Various techniques for estimating the symbol error rate associated with an antenna are known in the art. The symbol error rates that are calculated may each be based on a single received packet or multiple received packets (e.g. an average over a number of previous packets, etc.). As used herein, the term "symbol error rate" is intended to encompass all different methods and formats for expressing a rate.

In at least one embodiment of the present invention, a switched antenna arrangement is implemented within a wireless communication system that uses multicarrier communication. Multicarrier communication is a technique for transmitting data that divides the data into multiple pieces and then transmits the pieces in parallel via a number of separate narrowband carriers (i.e., sub-carriers). Multicarrier communication is often used to overcome intersymbol interference in channels by increasing the symbol period of the carrier, thus limiting the data rate transmitted through each sub-channel (i.e., by each sub-carrier). When the symbol period transmitted through a sub-channel is longer than the maximum multipath delay in the channel, the effect of intersymbol interference may be reduced

significantly. Because multiple carriers are used, relatively high data rates may be achieved overall using multicarrier techniques. Although the effect of intersymbol interference is reduced, multipath fading may still distort the data in a multicarrier system. For example, some of the sub-carriers may experience greater fading than others so that the signal magnitudes received by a receiver are different for different sub-carriers (i.e., non-homogeneous carrier amplitudes). The carriers that experience greater levels of multipath fading will typically have lower signal-to-noise ratios (SNR) at the receiver. These lower SNR sub-carriers in the received signal may compromise the receivers ability to accurately detect the data therein, even when the other sub-carriers in the signal have relatively high SNRs. Thus, antenna selection techniques based on average signal level, SNR, or signal to interference and noise level (SINR) may not be reliable. In at least one embodiment of the present invention, antenna selection is performed in a multicarrier communication system based on average symbol error rates taken over the sub-carriers of a multicarrier signal.

One form of multicarrier communication that is growing in popularity is orthogonal frequency division multiplexing (OFDM). OFDM is used in various wireless communication standards including, for example, IEEE 802.11a (IEEE Std 802.11a-1999), IEEE 802.11g, and others. In an OFDM system, the received signal on each sub-carrier may be represented as follows:

$$r_k(i) = \alpha_k(i) \cdot s(i) + n_k(i) \quad i = 1, 2, \dots, N; k = 1, 2, \dots, K$$

where  $i$  is the sub-carrier index,  $k$  is the antenna index,  $s(i)$  is the transmitted signal for the  $i$ th sub-carrier,  $r_k(i)$  is the received signal for the  $i$ th sub-carrier and the  $k$ th antenna,  $\alpha_k(i)$  is the channel gain for the  $i$ th sub-carrier and the  $k$ th antenna,  $n_k(i)$  is the noise plus interference for the  $i$ th sub-carrier and the  $k$ th antenna,  $N$  is the number of sub-carriers carrying data, and  $K$  is the number of antennas. In at least one embodiment of the present invention, an antenna is selected in a multicarrier system by identifying the antenna with the lowest average symbol error rate (SER) over the sub-carriers. This can be expressed as follows:

$$k_e = \arg \min_k \sum_{i=1}^N \Pr[e_k(i)]$$

where  $\Pr[e_k(i)]$  is the symbol error probability for the quadrature amplitude modulation (QAM) symbol on the  $i$ th sub-carrier (QAM is the data modulation technique used in, for example, the IEEE 802.11a wireless networking standard). To simplify the required computation, the above expression may be approximated using the error probability between the two closest signal constellation points, as follows:

$$k_e = \arg \min_k \sum_{i=1}^N Q \left[ \frac{\|\alpha_k(i)d\|}{\sqrt{2}\sigma_k(i)} \right]$$

where  $Q(x) = \int_x^{\infty} \frac{1}{\sqrt{2\pi}} e^{-\frac{t^2}{2}} dt$  is the probability of error in the constellation,  $d$  is the shortest distance between two transmitted QAM constellation points (i.e., the row or column spacing in a squared QAM constellation),  $\sigma_k(i)$  is the square root of the variance of the noise plus interference for the  $i$ th sub-carrier and the  $k$ th antenna, and  $\|\alpha_k(i)d\|$  is the shortest distance between two received signal points (i.e., the spacing in the received QAM constellation). Further simplification of the above expression may be achieved by approximating the function  $Q(x)$ , as follows:

$$k_e = \arg \min_k \sum_{i=1}^N \frac{\sqrt{2}\sigma_k(i)}{\alpha_k(i)d} \exp \left[ -\frac{\|\alpha_k(i)d\|^2}{4\sigma_k^2(i)} \right]$$

Any of the above equations may be implemented within the switch controller 20 of Fig. 1 or in other locations within a system.

Fig. 2 is a flowchart illustrating an example method 30 for use in selecting an antenna in a wireless communication system in accordance with an embodiment of the present invention. Signals are received at multiple antennas (block 32) and symbol error rates are determined for each of the multiple antennas based on the corresponding received signal(s) (block 34). The signals may be received at the multiple antennas all at the same time, one at a time, or in some other manner. Similarly, the symbol error rates may be determined for the

antennas all at the same time, one at a time, or in some other manner. In one possible approach, a signal is received and a symbol error rate is determined for each antenna of interest, one after another. Other techniques may alternatively be used.

In some systems, a single, non-averaged symbol error rate may be determined for each antenna. In other systems an average symbol error rate may be determined for each antenna. In a multicarrier system, for example, an average symbol error rate may be determined for each antenna over the sub-carriers of the corresponding received signal(s). In a code division multiple access (CDMA) system, an average symbol error rate may be determined for each antenna over the various codes of the system. As will be appreciated, the method that is used to determine the symbol error rate associated with an antenna will typically depend upon the specifics of the implementation.

An antenna is subsequently selected for use in communication based on the symbol error rates determined above (block 36). For example, in one possible approach, an antenna is selected that has a lowest symbol error rate. The selected antenna may be used as a receive antenna, a transmit antenna, or as both a receive antenna and transmit antenna. The above-described antenna selection method 30 may be repeated at predetermined times or in response to the detection of a predetermined condition (e.g., a high error rate, etc.). In at least one embodiment, the procedure is repeated for each incoming packet (or for every other packet, or every third packet, etc.). In at least one other embodiment, symbol error rates are averaged over multiple received packets.

Fig. 3 is a flowchart illustrating an example method 40 for use in selecting an antenna in a multicarrier wireless communication system in accordance with an embodiment of the present invention. In at least one implementation, the method 40 is performed within an IEEE 802.11a based system, although other multicarrier systems may also implement the method 40. The method first switches to a first of K antennas (blocks 42 and 44). A short preamble is next detected using the first antenna (block 46). The detected preamble may then be used to estimate the noise plus the interference power for the first antenna (block 48). A channel frequency response may then be computed for the first antenna (block 50). The estimated noise plus interference power and the channel frequency response may then be used to estimate an average symbol error rate for the first antenna over the sub-carriers of the detected preamble (block 52). This estimation may be performed using, for example, one of the equations discussed previously or other estimation techniques may be used. Next, it is



determined whether average symbol error rates have been estimated for all of the antennas of interest (block 54). Because error rates have not been determined for all antennas of interest, the above procedure is repeated for a next antenna (block 56). After average symbol error rates have been generated for all antennas of interest (block 54), an antenna is selected for use  
5 in wireless communication based on the average symbol error rates (block 58). Synchronization and phase tracking may then be performed for the selected antenna. It should be appreciated that an average symbol error rate value does not have to be generated for every antenna associated with a particular device during an antenna selection determination, but may instead be generated for only a subset of the antennas associated with  
10 the device. The antenna selection method 40 may be repeated at predetermined times or in response to the detection of a predetermined condition (e.g., a high error rate, etc.). In at least one embodiment, the procedure is repeated for each incoming packet (or for every other packet, or every third packet, etc.). In at least one other embodiment, symbol error rates are averaged over multiple received packets.

15 In the foregoing detailed description, various features of the invention are grouped together in one or more individual embodiments for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as reflecting an intention that the claimed invention requires more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive aspects may lie in less than all features of each  
20 disclosed embodiment.

Although the present invention has been described in conjunction with certain embodiments, it is to be understood that modifications and variations may be resorted to without departing from the spirit and scope of the invention as those skilled in the art readily understand. Such modifications and variations are considered to be within the purview and  
25 scope of the invention and the appended claims.

What is claimed is:

1. A method for use in a wireless communication system, comprising:  
determining symbol error rates for antennas in a group of antennas; and  
selecting an antenna from the group of antennas for use in subsequent wireless  
5 communication based on the symbol error rates.
2. The method of claim 1, wherein:  
selecting an antenna includes selecting an antenna that has a lowest symbol error rate.
3. The method of claim 1, wherein:  
said symbol error rates include average symbol error rates.
- 10 4. The method of claim 3, wherein:  
said wireless communication system is a multicarrier system; and  
said average symbol error rates are averaged over a plurality of sub-carriers.
5. The method of claim 4, wherein:  
determining symbol error rates includes determining an average symbol error rate for  
15 a first antenna by summing symbol error probabilities corresponding to multiple sub-carriers  
associated with said first antenna.
6. The method of claim 4, wherein:  
determining symbol error rates includes determining an average symbol error rate for  
a first antenna by estimating a sum of symbol error probabilities corresponding to multiple  
20 sub-carriers associated with said first antenna using an error probability between two closest  
signal constellation points.
7. The method of claim 4, wherein:  
said wireless communication system uses orthogonal frequency division multiplexing  
(OFDM).
- 25 8. The method of claim 3, wherein:

said wireless communication system is a code division multiple access (CDMA) based system; and

said average symbol error rates are averaged over a plurality of codes.

9. The method of claim 1, wherein:

5 determining symbol error rates includes determining a first symbol error rate for a first antenna by calculating an average over multiple received packets.

10. An apparatus comprising:

an antenna switch to controllably couple one of a plurality of antennas to a wireless communication circuit; and

10 a switch controller to select an antenna from said plurality of antennas to be coupled to said wireless communication circuit for use in supporting wireless communication based on symbol error rates associated with antennas in said plurality of antennas.

11. The apparatus of claim 10, wherein:

15 said switch controller includes an error estimator to estimate said symbol error rates associated with said antennas.

12. The apparatus of claim 10, wherein:

said symbol error rates are average symbol error rates.

13. The apparatus of claim 12, wherein:

20 said wireless communication circuit supports multicarrier communication; and said average symbol error rates are averaged over a plurality of sub-carriers.

14. The apparatus of claim 13, wherein:

said switch controller includes an error estimator to determine an average symbol error rate for a first antenna by summing symbol error probabilities corresponding to multiple sub-carriers associated with said first antenna.

25 15. The apparatus of claim 12, wherein:

said wireless communication circuit supports code division multiple access (CDMA);  
and  
said average symbol error rates are averaged over a plurality of codes.

16. The apparatus of claim 10, wherein:  
5 said switch controller generates a switch control signal for said antenna switch.
17. The apparatus of claim 10, wherein:  
said switch controller selects an antenna having a lowest average symbol error rate.
18. The apparatus of claim 10, wherein:  
said wireless communication circuit includes one of: a wireless transmitter, a wireless  
10 receiver, and a wireless transceiver.
19. A system comprising:  
a plurality of antennas that includes at least one dipole antenna;  
an antenna switch to controllably couple one of said plurality of antennas to a wireless  
communication circuit; and  
15 a switch controller to select an antenna from said plurality of antennas to be coupled to  
said wireless communication circuit for use in supporting wireless communication based on  
symbol error rates associated with antennas in said plurality of antennas.
20. The system of claim 19, wherein:  
said switch controller includes an error estimator to estimate said symbol error rates  
20 associated with said antennas.
21. The system of claim 19, wherein:  
said symbol error rates are average symbol error rates.
22. The system of claim 19, wherein:  
said wireless communication circuit supports multicarrier wireless communication;  
25 and

said average symbol error rates are averaged over a plurality of sub-carriers.

23. The system of claim 19, wherein:

said wireless communication circuit supports code division multiple access (CDMA);

and

5      said average symbol error rates are averaged over a plurality of codes.

24. The system of claim 19, wherein:

said system is part of a wireless access point.

25. The system of claim 19, wherein:

said system is part of a wireless network interface card (NIC).

1/3

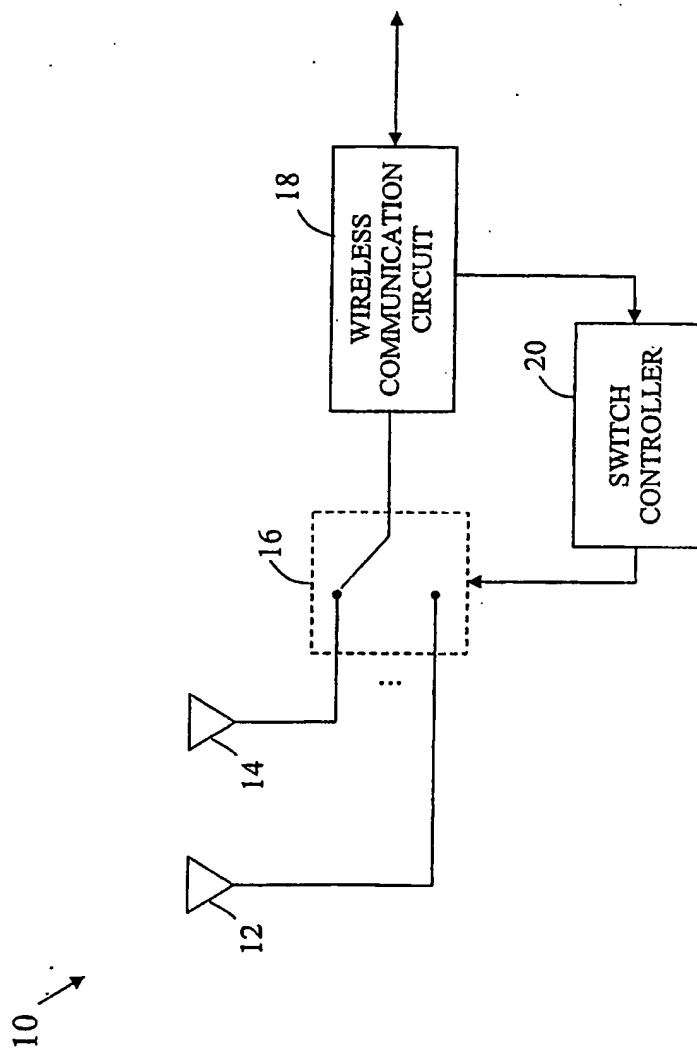


Fig. 1

2/3

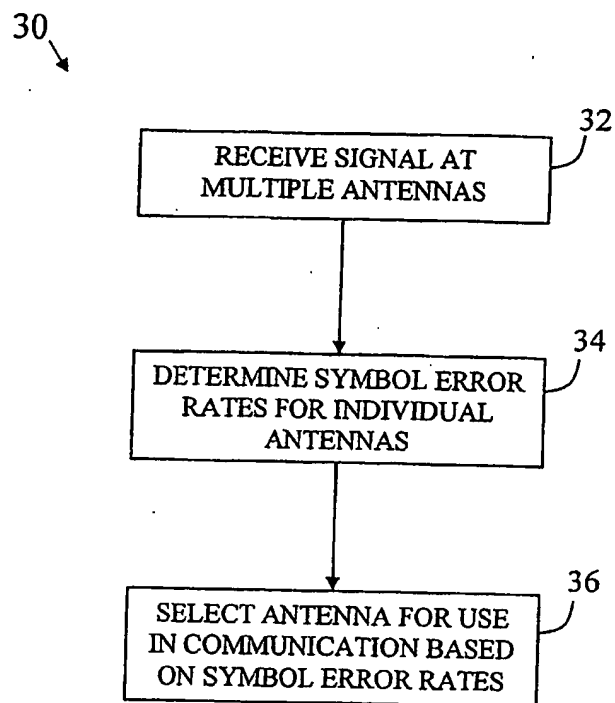


Fig. 2

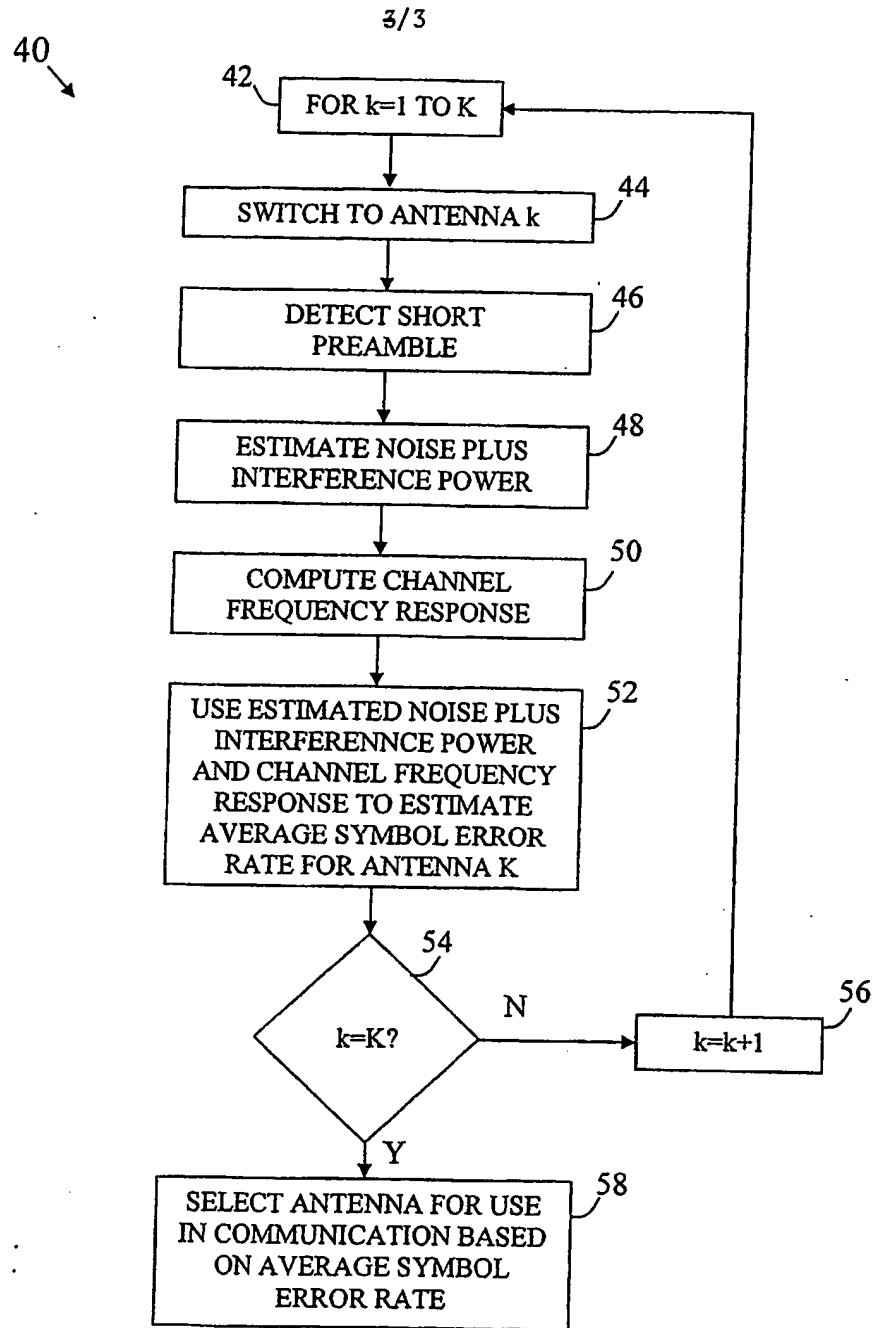


Fig. 3



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US2004/032948

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04B7/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 987 838 A1 (ROBERT BOSCH GMBH) 22 March 2000 (2000-03-22) abstract paragraphs '0003!', '0008!', '0010!', '0011!', '0017!' - '0022!' claims 1-8 figures 1,6	1-25
X	EP 1 011 282 A2 (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD) 21 June 2000 (2000-06-21) paragraphs '0007!' - '0016!', '0022!' - '0037!', '0047!' - '0051!'	1-25

-/-

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

26 January 2005

Date of mailing of the international search report

09/02/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Fernández Cuenca, B

BEST AVAILABLE COPY

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US2004/032948

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 289 384 A1 (THOMSON-CSF) 2 November 1988 (1988-11-02) page 1, lines 15-45 page 2, lines 1-37 page 4, lines 9-19	1-25
X	WO 98/19401 A1 (NORTHERN TELECOM LIMITED) 7 May 1998 (1998-05-07) abstract page 5, line 25 - page 7, line 15 page 8, line 9 - page 9, line 29 page 16, lines 3-11 figures 2,4	1-25

BEST AVAILABLE COPY

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2004/032948

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0987838	A1	22-03-2000	NONE
EP 1011282	A2	21-06-2000	JP 3380481 B2 24-02-2003 JP 2000183790 A 30-06-2000 CN 1257361 A 21-06-2000 DE 69918251 D1 29-07-2004 KR 2000048164 A 25-07-2000 US 6671524 B1 30-12-2003
EP 0289384	A1	02-11-1988	FR 2614157 A1 21-10-1988 DE 3870980 D1 17-06-1992
WO 9819401	A1	07-05-1998	CA 2188845 A1 25-04-1998 CA 2219096 A1 25-04-1998 CA 2219228 A1 25-04-1998 WO 9819402 A1 07-05-1998 CN 1211359 A 17-03-1999 EP 0870371 A1 14-10-1998 EP 0870372 A1 14-10-1998 US 6118773 A 12-09-2000 US 6002672 A 14-12-1999

BEST AVAILABLE COPY